

**4-Person Hands-Free Floor Mount
Stainless Steel Wash Station**

Model	Flow-Rate
58FK1	Standard 2.0 GPM
58FK1.5	Low-Flow 0.5 GPM

Product Specifications

Constructed from welded #16 gauge type 304 stainless steel. The front, bottom and back are formed from a single sheet with a rolled rim on front and sides. Exposed surfaces have a blended uniform satin finish. Specially designed knee valves provide easy access to working parts without disconnecting mount or plumbing.

Outside Dimensions	80" x 20" x 45" High
Inside Bowl Size	77" x 16-1/2" x 8" Deep
Back Splash Height	10"
Water Activation	Single Knee Pedal Valve
Flow Rate	2 GPM
Inlet Connections	3/8" Male Compression
Drain Opening	2"
Finish	Satin
Strainer	1-1/2" Dia. Duo Basket Strainer

Includes

- (1) Floor mount wash station
- (1) Leg assembly set
- (6) Washers and nuts for connection sink to leg assembly set
- (4) Single knee pedal valve (bottom mount) with 4 nuts
- (4) Swivel gooseneck spout with aerator
- (4) Connecting tube for valve to spout connection
- (8) Fittings, brass, 0.375" male compression and 0.375" male NPT
- (4) Mixing check valve
- (2) Strainer assembly with basket

Product Compliance

NSF/ANSI 2 Food Equipment
NSF/ANSI 372 Low-Lead



Part: _____ Quantity: _____

Project: _____

Contact: _____

Date: _____


Approval: _____

Notes:




4-Person Hands-Free Floor Mount Stainless Steel Wash Station
Models 58FK1 and 58FK1.5


■ Top

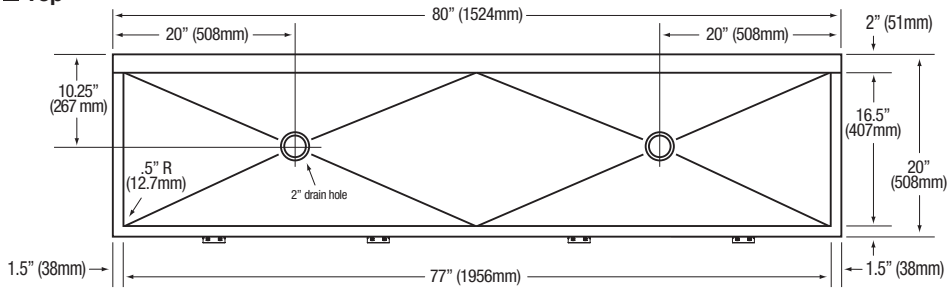


■ Front

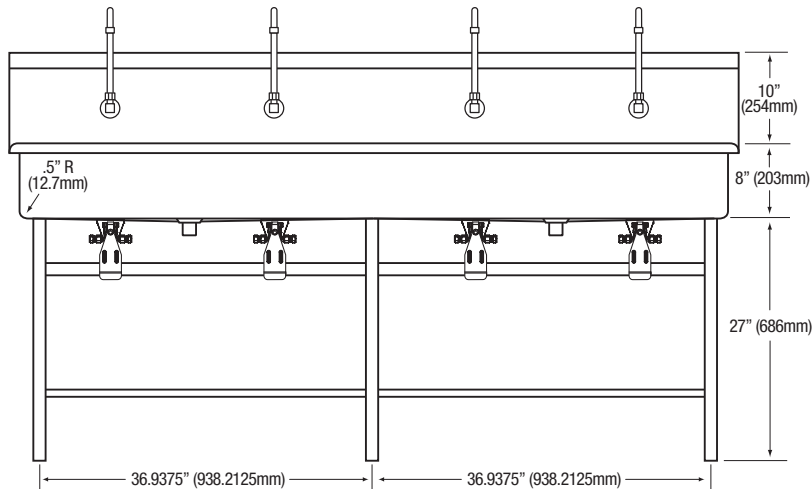


■ Side

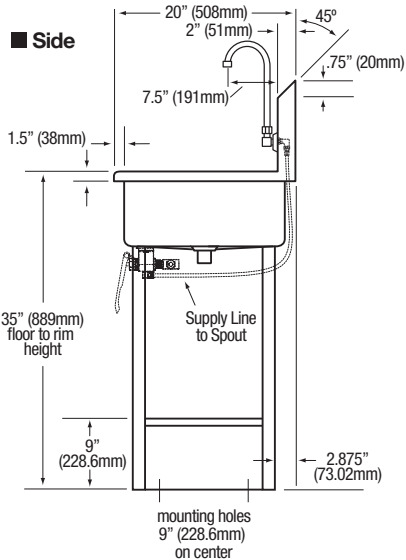

■ Hole Configurations

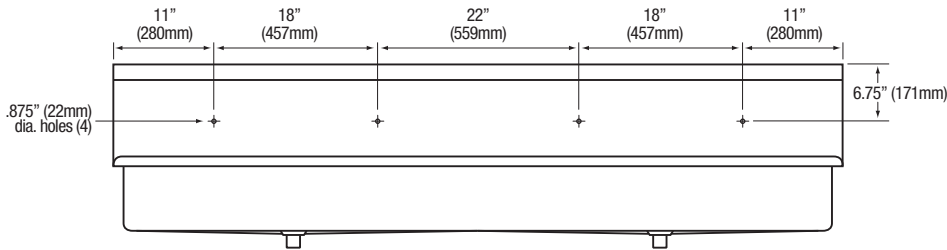

■ Floor Mounting Detail



■ Supply Line Detail

